


Bluetooth/Play & Pause



Sound volume +/-



Wake-up/Sleep-Aid

Knob Switch Setup

- Long press 1.5 secs to enter menu settings
- Turn left and right to select function setting
- Press once to enter or confirm function setting
- Press twice to exit menu settings
- When the alarm rings, press once to snooze for 9 minutes, press twice to turn off the alarm.
- In the standby status, press in and turn to adjust the time display brightness: 25%, 50%, 100%.

TOUCH ZONE 2

Mood Light - Left Side

- Turn on/off: Pat twice
- Color select: Press once to stop color change
- Color gradient: Press once to resume

TOUCH ZONE 1

Warm White Light - Right Side

- Turn on/off: Pat twice
- Dimming: Long press to activate



AM/PM display

AM
PM

00:00

Current time display

Wake-up sounds

Wake-up time

Current time


Sleep-aid time

Sleep-aid sounds

12H/24H


Bluetooth

Wake-Up Light Alarm Clock User Manual

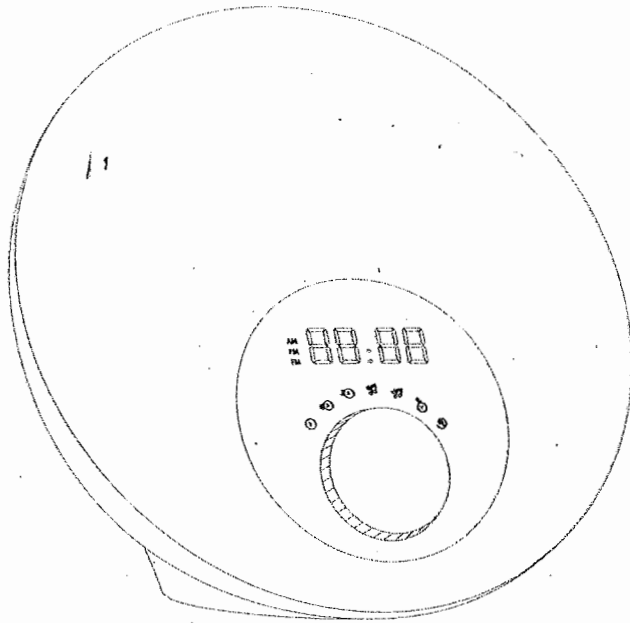


Product Diagram

1. Touch switch

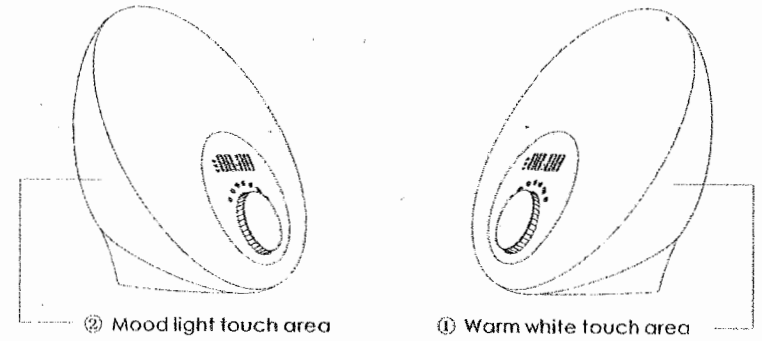

2. Knob switch

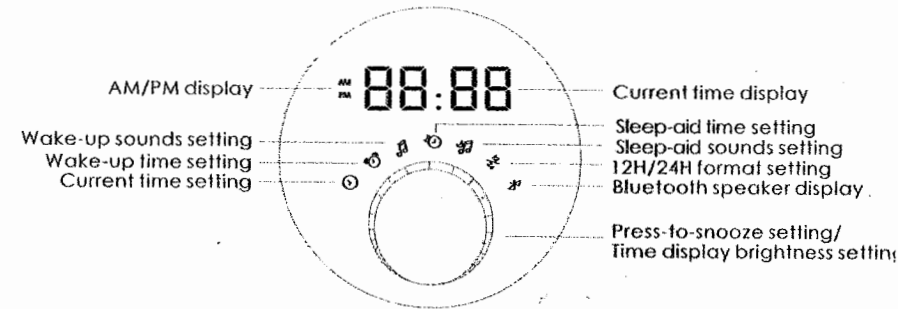

What's In The Box

1xWake-up light	1xUser manual
1xAdapter	

How to use

Power on


Using the provided adapter to connect the lamp with power socket, "AM 12:00" will be shown by default. Meanwhile, the other 7 icons will be shown in return, and they will disappear after 1.5 seconds.

1. Knob switch setup:


Long press the knob switch for 1.5 secs to enter the menu settings, then complete each setting by the following operations.

Press twice to exit the menu settings or wait for 30 secs to let it exit automatically.


• Setting current time

Turn the knob switch to make the icon  flash, then press the knob to enter hours or minutes setting. Turn the knob to select hours or minutes. Finally, press the knob switch again to complete the settings.


• Setting wake-up time

Turn the knob switch to make the icon  flash, then press the knob switch to enter hours or minutes setting, and then turn the knob switch again to select hours or minutes. Finally, press the knob switch again to complete the settings.


• Setting wake-up sounds

Turn the knob switch to make the icon  flash, then press the knob switch to enter wake-up sound setting, and then turn the knob switch again to select the sound from 6 sounds. Finally, press the knob switch again to complete the settings.


• Setting sleep-aid time

Turn the knob switch to make the icon  flash, then press the knob switch to enter minutes setting, and then turn the knob switch again to select 5, 10, 15, 20, 25, 30 minutes. Finally, press the knob switch again to complete the settings.

• Setting sleep-aid sounds

Turn the knob switch to make the icon  flash, then press the knob switch to enter sleep-aid sound setting, and then turn the knob again to select the sound from 4 sounds. Finally, press the knob switch again to complete the settings.

• Setting 12H/24H time format


Turn the knob switch to make the icon  flash, then press the knob switch to enter 12H/24H time format setting, and then turn the knob switch again to select 12 or 24. Finally, press the knob switch again to complete the settings.


• Setting time display brightness

Press once the knob switch in turn to set the brightness to 25%, 50% or 100%.


2. Button switch setup

• Bluetooth speaker on/off


• Turn on: Press once the button  to turn on the bluetooth pairing, the icon will flash on the screen, the pairing time is limited within 15 minutes. The icon will stop flashing and display on the screen when the bluetooth is connected successfully. 3 kinds of warning tones will be played: "Turn on" "Connected" and "Turn off" the bluetooth.


• Play/Pause: Press the button  play or pause the bluetooth function.

• Move Previous/Move Next: Turn the knob switch clockwise or counter-clockwise to go forward or back.


- **Turn off:** Press once the button  to turn off the bluetooth speaker, the icon will disappear on the display screen.

- **Sound volume +/-**


Turn up: Press the button + to turn up the volume from 0 to 10 levels.

Turn down: Press the button - to turn down the volume from 10 to 0 levels.

- **Wake-up on/off**

- **Turn on:** Press the button  to activate wake-up functions, the button will be shown on the display screen. The warm white will gradually brighten 30 minutes before the alarm clock time. It will reach the brightest level at the alarm clock time.
- The alarm clock will ring for 20 minutes only once. After, the sound volume will turn up gradually, and it will reach the highest volume after 30 seconds. Then it will go off after ringing for 20 minutes if snooze button is not pressed. Meanwhile, the warm white will also be off at this time.
- **Press to snooze:** When the alarm clock rings, press the switch to snooze for 9 minutes, the button will flash frequently for 9 minutes. Press the knob switch twice to turn off the alarm clock and warm white. There is no limit to how many times you press the knob switch for snoozing.
- **Turn off:** Press the button on the top to cancel the wake-up functions, the button will disappear on the display screen.

- **Sleep-aid on/off**


- **Turn on:** Press the button  to turn on the sleep-aid sound, the button will be shown on the display screen. The sound will be turned down gradually until it disappears at the sleep-aid time. If the warm white is turned on, it will dim gradually

until completely off at the end of the sleep-aid time. If the mood light is on, it will also turn off at the sleep-aid time.


- **Turn off:** Press the button again to turn off the sleep-aid sound, the button will disappear on the display screen.

3. Touch switch setup

- **Warm white mode**

- **Turn on:** Pat the touch area twice  to turn on the warm white.
Brightness adjustable: Long press the touch area to adjust the desired brightness. Once the max/min brightness value is reached, please remove your hands. Then, long press the touch area again to adjust the brightness accordingly.
- **Turn off:** Pat the touch area twice to turn off the warm white.

- **Mood light mode**

- **Turn on:** Pat the touch area twice  to activate automatic color changing.
 - **Color selection:** Pat the touch area once to select your favorite color.
 - **Color gradient:** Pat the touch area once again to return to color changing.
- **Turn off:** Pat the touch area twice, to turn off the mood light.
- The warm white and mood light cannot work at the same time. Both the warm white and mood light have memory functions and can memorize preset brightness or color.



4. Backup Power

- In the event of power loss, this product will still be powered by the included 3V Lithium button battery. Time, alarm clock and Bluetooth functions are able to function normally.

5 Year Best In Class Warranty

We guarantee that your product will be free from defects in material or workmanship for a period of 5 years from the date of purchase. If any such defect is discovered within the warranty period, Adamax Inc, at its discretion, will replace the product at no cost. For warranty service or questions about your product, please feel free to email cs@adamaxinc.com or call us at 510-895-1881.

3. Button switch

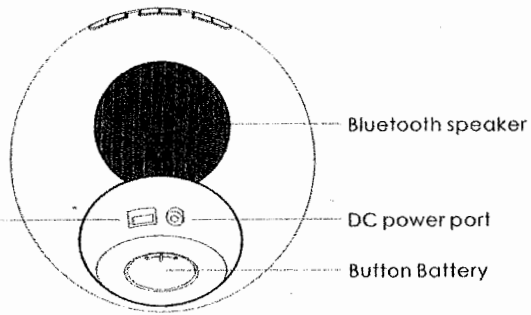

Specifications

Power	5W
Light source	LED SMD2835 27Pcs+RGB SMD5050 12Pcs
Color temperature	2700K (Not adjustable)
Warm white setting	1%-100% Brightness adjustable (Stepless dimming)
Mood light setting	256C living color light (Single color, color gradient)
Adapter specification	Input: AC100-240V; Output: DC12V, 1.5A
Wake-up time setting	Setting hours & minutes
Sleep-aid time setting	Setting 5, 10, 15, 20, 25, 30 minutes
Power snooze time	9 minutes
Wake-up/Aid-sleep sounds	6 sounds/4 sounds
Sound volume	0-10 levels
Power back up	210mAh button battery (CR2032)
Bluetooth speaker	Yes
Time display format	12H/24H
Time display brightness	25%/50%/100%
Lamp materials	ABS+PMMA
Lamp color	White
Lamp size	Φ180*H158mm

5

6